

GE Sensing

Features

- Ranges from 5 psi to 1000 psi (350 mbar to 70 bar)
- High accuracy over wide temperature range
- Full CAN version 2.0 B
- CANopen protocol
- Input/output isolation
- Device self-checking and diagnostics

The DPS 4000 Series is a state of the art range of digital output pressure transducers featuring a CANbus serial communications interface. Fully temperature corrected pressure readings are output as a digital word in any one of 24 engineering units, requiring no user system set-up or calibration. The integral digital electronics enhance performance to levels unmatched by traditional analog transducers.

Communication software is based on the CANopen protocol. The DPS 4000 functionality offers the user access to last/next calibration date, calibration routines and serial number identification among others.

Capable of operation from a range of supply voltages (including batteries) the transducer is fully input/output isolated for complete system protection and user confidence. With ranges from 5 psi to 1000 psi (350 mbar to 70 bar) and 400% overpressure it is ideal for many applications where optimum transducer performance is essential and customer specific requirements can be accommodated.

DPS 4000

Druck CANbus Digital Output Pressure Transducers

DPS 4000 is a Druck product. Druck has joined other GE high-technology sensing business under a new name—GE Industrial, Sensing.



DPS 4000 Specifications

Pressure Measurement

Operating Pressure Ranges

Zero based ranges: 5 psi*, 10, 15, 30, 50, 100, 150, 300, 500 and 1000 psig (350 mbar, 700mbar, 1, 2, 3.5, 7, 10, 20, 35, 70 bar), absolute or differential.

Bi-directional gauge and differential ranges available on request.

**5 psi gage, or differential only*

Overpressure

The pressure range can be exceeded by the following with negligible effect on calibration:

Positive side: 4 x full scale (FS) (2000 psi maximum) (140 bar maximum)

Negative side: 2 x FS (150 psi maximum) (10 bar maximum).

Line Pressure

500 psi (35 bar) maximum (differential model only).

Positive Pressure Media

Fluids compatible with Stainless Steel 316 L and Hastelloy C276.

Excitation Voltage

7.5 to 30 VDC.

Output Configuration

CANopen digital data via CANbus interface. User configurable pressure reading <100Hz. (factory set to default value of 10Hz).

Software Protocol

In accordance with:

- DS301 V 4.01 (CANopen)
- DS404 V 1.0 (Analog input device profile)
- DSP 305 V 1.0 (Layer setting service)

Performance

Accuracy

0.2% reading down to 50% FS, then 0.1% FS to zero. Includes all errors over 50°F to 140°F (10°C to 60°C).

Long Term Stability

Typically less than 0.08% FS per annum.

Operating Temperature Range

-40°F to 175°F (-40°C to 80°C).

Insulation Resistance

Greater than 100 MΩ at 500 VDC

Mechanical Shock

1000 g, 1 mS half sine pulse in three mutually perpendicular axes will not affect performance.

Vibration

Response <0.05% FS/g at 30 g peak 10 Hz to 2 kHz, limited by 0.5 in (12 mm) double amplitude.

Safety

CE Marked

EMC emissions: EN 50081-1

EMC immunity: EN 61000-6-2

Physical

Weight

0.19 kg (7 oz) nominal.

Pressure Connection

Male:

- G1/8B (60° Int Cone)
- G1/4B (60° Int Cone or Flat End)
- 1/4 NPT
- 7/16 UNF to MS33656-4
- M14 x 1.5

Female:

- G1/4,
- 1/4 NPT
- Others available - refer to Druck.

Electrical Connection

MIL-C-26482 six pin bayonet plug or six core shielded cable (3 ft. supplied as standard)

Alternatives available - refer to Druck.

Options


- (A) Mating connector for bayonet plug
- (B) Negative calibration
- (C) Alternative engineering units
- (D) User instruction handbook

Calibration Standards


Druck pressure transducers are calibrated against precision calibration equipment which is traceable to International Standards.

Installation Drawings

Model DPS 4160 (cable version DPS 4110)

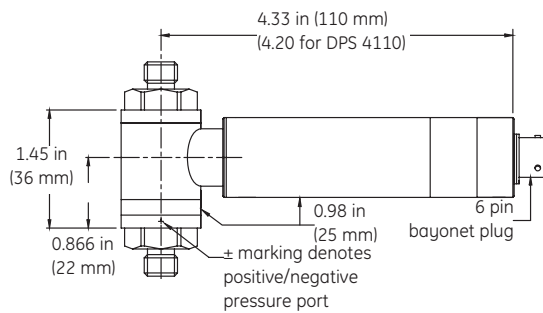

Model DPS 4010 (plug version DPS 4060)

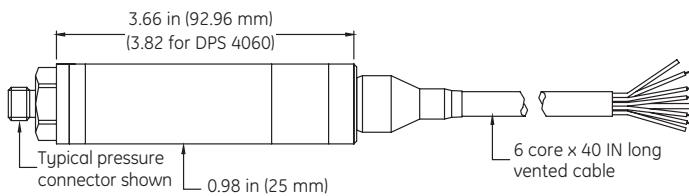

Ordering Information

(1) Select Model number

DPS	Basic Code	Type Number	Pressure Type	Code	Electrical Connection
↓ DPS	40		Gauge or absolute		
	41		Differential		
	40			10	Six core vented screened cable (3 ft)
				60	Six pin bayonet plug
				60	Typical example

(2) Pressure range

(3) Gauge, absolute or differential

(4) Pressure connection

(5) Options (if required)

GE
Sensing



©2007 GE All rights reserved.
920-422A

All specifications are subject to change for product improvement without notice.
GE® is a registered trademark of General Electric Co. Other company or product
names mentioned in this document may be trademarks or registered trademarks
of their respective companies, which are not affiliated with GE.

www.ge.com/sensing